

## Lumistar Luminaire ASL 55-LED-Ex, Aluminium

CE 0158

3755.454 f



**II 2G Ex db IIC T6 Gb**  
**II 2D Ex tb IIIC T80°C Db**

- **For mounting on sight glass fittings:**  
This Ex-type sight glass luminaire is designed for universal applications and is ideal for use in combined sight and light ports (single-flange version) or with two separate ports (2-flange version).
- **The special advantages of Lumiglas LED technology:**
  - vibration-proof
  - long service life and operational reliability
  - continuous LED operation up to around 50,000 hours
  - optimal for fittings that are difficult to access
  - no heat radiation in the light aperture (cold light)
  - no unwanted additional heat in chemical and/or biological processes
  - extremely high-contrast illumination
- **Compact design, powerful light output:**  
Glare-free illumination; suitable for circular sight glass fittings to DIN 28120/DIN 28121 or similar, for screw-type sight glass fittings in compliance with DIN 11851 and for sight glass fittings on flow indicators.
- **Application:** For illuminating visual flow indicators, pipelines, laboratory mixers, bio-reactors as well as the interior of tanks, hoppers, silos, agitators and other, normally closed, vessels and reactors in **potentially explosive environments**.  
**Gas: Zones 1 and 2, Dust: Zones 21 and 22.**



Lumistar luminaire ASL 55-LED-Ex

- **Protection class:** IP 65 and IP 67 acc. to DIN EN 60529
- **Operating conditions:** Independent of the internal pressure/vacuum in the vessel. On no account should a sight glass luminaire be used as a substitute for the mating flange or instead of the complete sight glass flange assembly or on its own to close a vessel port.
- **Lumistar luminaires of this type are approved for use in ambient temperatures of between -20°C and +40°C.**
- **Optional with 11° or 26° light aperture reflector**
- **Technical data Ex protection:**  
This luminaire meets the essential safety and health requirements by complying with the regulations for
  - a) **Gas**

EN 60079-0: 2012+A11:2013	General Requirements
EN 60079-1: 2014	Flame-proof Enclosures ,d'
Explosion group:	IIC (includes IIA and IIB)
Temperature class:	T6
  - b) **Dust**


EN 60079-0: 2012+A11:2013	General Requirements
EN 60079-31: 2014	Protection by Enclosures ,t'
Explosion group:	IIIC (includes IIIA and IIIB)
Temperature class:	T80°C
- **EC-Type Examination Certificate:** BVS 09 ATEX E 170
  - II 2G Ex db IIC T6 Gb
  - II 2D Ex tb IIIC T80°C Db
- **Operating voltage:**

24 V	AC/DC	LED 11 W/15 W
120-230 V	AC/DC	LED 11 W/15 W

 Protected by 1A miniature fuse.  
Equipped with 4 or 7 high-power LEDs.

- **Voltage:** AC/DC
- **Simple electrical connection via integrated cable or via Ex d cable gland.**
- **Electrical connection options:**
  - Works-fitted connection cable (2 m standard length), resin-cast in screwed cable gland for pressure-tight cable entry, temperature-resistant up to 110°C.  
Other lengths available on request: 5 m, 10 m, 20 m
  - By way of screwed cable gland acc. to EN 60079-14
  - Other types of cable glands and cables are shown in the table overleaf.
- **Fastening options:**  
Luminaires for sight glasses on circular fittings and visual flow indicators are mounted on the mating flange by means of the hinged bracket. With screw-type sight glass fittings, the luminaire is attached to the slotted cover nut.  
  
**The Lumistar luminaire ASL 55-LED-Ex fits the following nominal sizes:**
  - Circular sight glass fitting acc. to DIN 28120: DN 40
  - Circular sight glass fitting acc. to DIN 38121: DN 40
  - Sight glasses in flow indicators: DN 50
  - Screw-type sight glass fittings similar to DIN 11851:
    - From DN 50 up, the unit is mounted by way of a separate flange attachment.
    - From DN 80 up, the unit is secured using the hinged bracket.

• **Dimensions and electrical data for Lumistar luminaire ASL 55-LED-Ex:**

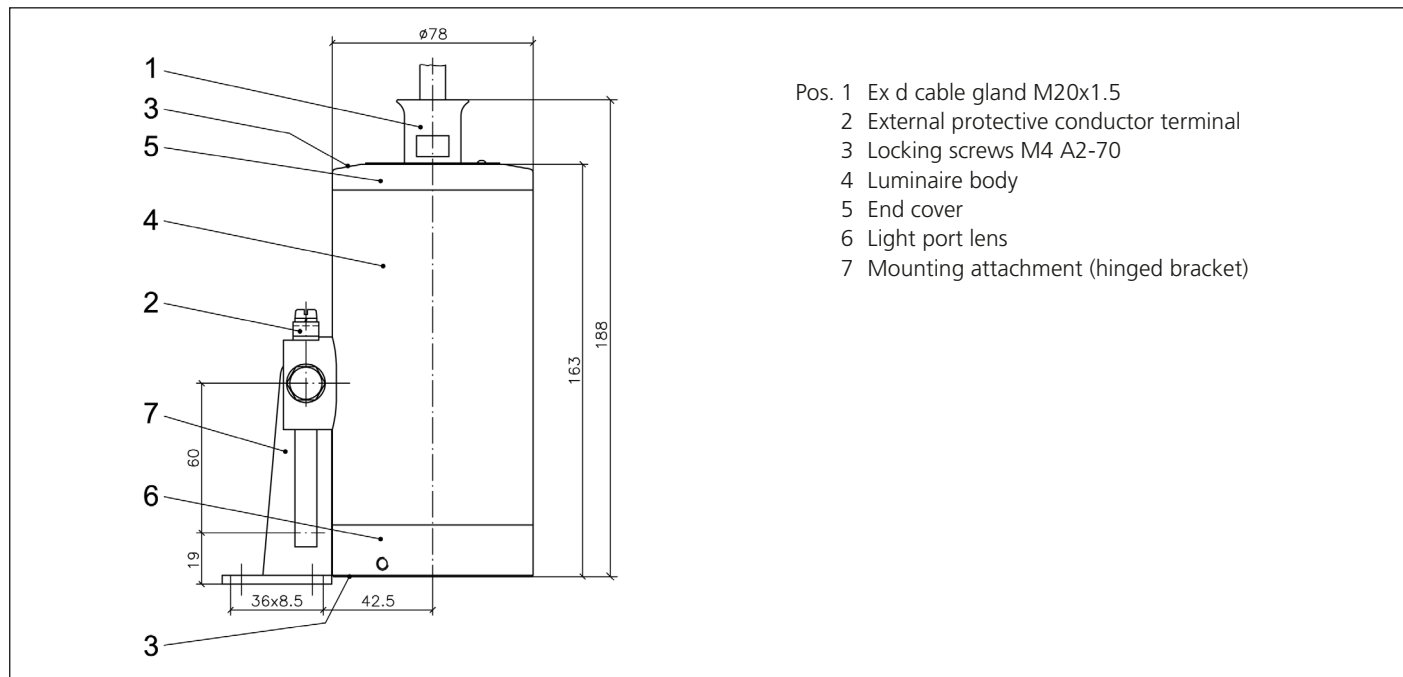

- Pos. 1 Ex d cable gland M20x1.5  
 2 External protective conductor terminal  
 3 Locking screws M4 A2-70  
 4 Luminaire body  
 5 End cover  
 6 Light port lens  
 7 Mounting attachment (hinged bracket)

• **Components and materials:**

- Luminaire body (4) and end cover (5): Aluminium alloy AlMgSi 0.5, paint finish RAL 9007
- Light port lens (6): Unit consisting of ring flange (aluminium alloy AlMgSi 0.5, paint finish RAL 9007) and borosilicate glass

- Hinged mounting bracket (7): Stainless steel 1.4301 (see accessories)
- Cable gland (1): M20x1.5

• **Weight (with 2 m connecting cable): 1.5 kg**

• **Connecting data: Temperature classification and electrical parameters (see also: EC Type-Examination Certificate)**

No.	ASL 55-LED-Ex Variant	Part No.	Voltage Volt	Illuminant	Ambient temperature range -20°C ≤ T <sub>a</sub> ≤ +40°C	
1	(24 V) 11 W	3541.681.00	24 ≈	4 LEDs	2G T6	2D T80°C
2	(120-230 V) 11 W	3541.682.00	120-230 ≈	4 LEDs	2G T6	2D T80°C
3	(24 V) 15 W	3541.691.00	24 ≈	7 LEDs	2G T6	2D T80°C
4	(120-230 V) 15 W	3541.692.00	120-230 ≈	7 LEDs	2G T6	2D T80°C

\* Delivery possible: red, blue, ultraviolet, infrared

• **Only combinations of the following cable entry glands and cables should be used:**

Cable gland types	Cable types
HSK-M-Ex-d, Part No. 9103.123.00 M20x1.5, nickel-plated brass (by Hummel)	EVA flexible sheathed cable, Sinotherm 110, Part No. 3403.017.00, 3x1.5 mm <sup>2</sup> , Ø 8.5 mm
KU1BPM20-Ex-d-Alpha X Part No. 9103.130.00 M20x1.5, nickel-plated brass (by RST)	Ölflex Heat 180, Part No. 3403.045.00, 3x1.5 mm <sup>2</sup> , Ø 8.9 mm
	Ölflex Heat 180, Silflex UR-AWG18, Part No. 3403.044.00, 5x1.0 mm <sup>2</sup> , Ø 10.3 mm
	Ölflex Classic 110 black, Part No. 3403.051.00, 3x1.5 mm <sup>2</sup> , Ø 10.1 mm

• **Accessories:**

No.	Component	Part No.
1	Luminaire mounting bracket (hinged)	0354.025.00
2	Luminaire mounting attachment, flanged adapter collar MV65	1356.039.00
3	Ex-timer switch	On request
4	Connecting cable	On request
5	Luminaire with Ex 'd' cable gland	On request

• **Order data:**

e.g. Lumistar luminaire ASL 55-LED-Ex (24V) 11 W, Ex db IIC T6, 4 LEDs, with 2 m connecting cable, part no. 3541.681.00

All dimensions in mm unless stated otherwise. Subject to change without prior notice. 08.18