



MX Street Clarus

Advantages



- ceramic LEDs, corrosion resistant
- a dozen types of lenses allowing optimum light distribution
- tool-free opening of the luminaire
- pressure compensation valve
- control possible in DALI, DIM 1-10V, Virtual Extension, PLC



LED I

Product code	P	lm	K	Ra	IP	Beam angle	Weight
TL-I-WW-ENC	119	15400	3000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-I-NW-ENC	110	15450	4000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-I-CW-ENC	110	15500	5700K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg







LED II

Product code	P	lm	K	Ra	IP	Beam angle	Weight
TL-II-WW-ENC	136	17600	3000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-II-NW-ENC	126	17650	4000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-II-CW-ENC	126	17700	5700K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg


LED III

Product code	P	lm	K	Ra	IP	Beam angle	Weight
TL-III-WW-ENC	153	19800	3000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-III-NW-ENC	142	19850	4000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-III-CW-ENC	142	19900	5700K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg

LED IV

Product code							
TL-IV-WW-ENC	170	22000	3000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-IV-NW-ENC	157	22050	4000K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg
TL-IV-CW-ENC	157	22100	5700K	>70	66	30°x120°, 45°x150°, 70°x120°	11,7 kg



Dimensions

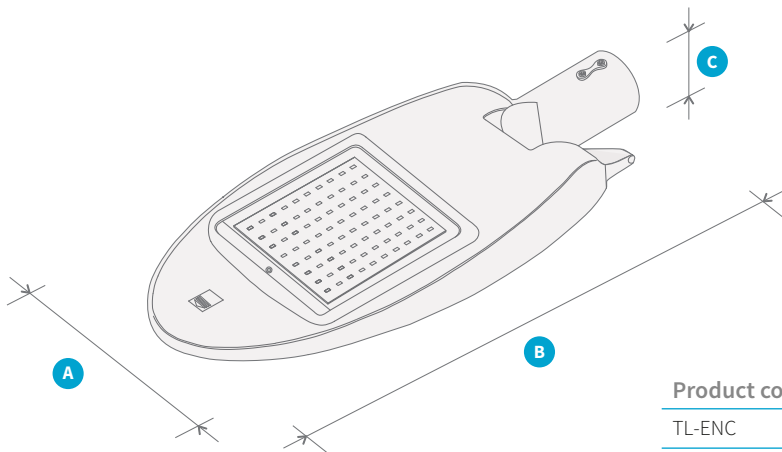


Product code	A	B	C
TL-ENC	359	823	175

Shipping quantity			
TL-ENC	2	20 ²	Pallet size 1 - 120x80




Mounting

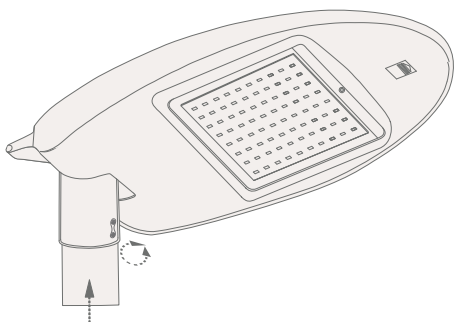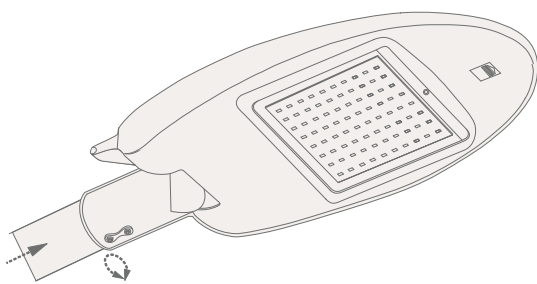

pole mounted



Luminous Intensity Distribution

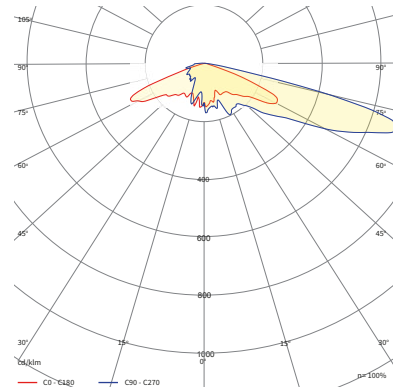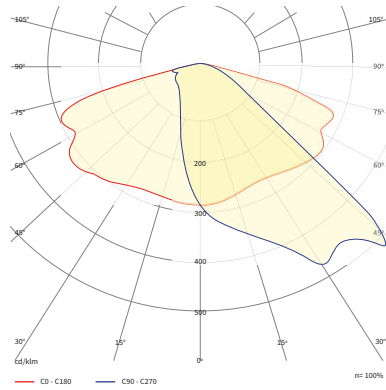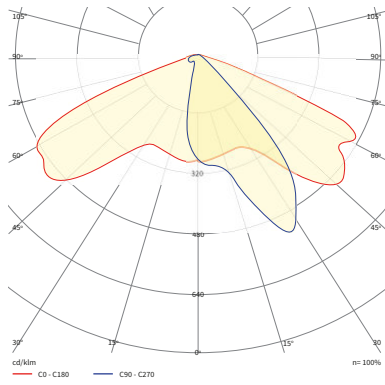

Available configurations

TL-I-ENC
TL-II-ENC
TL-III-ENC
TL-IV-ENC



Size	I	II	III	IV	
1 Model	R60 Pole mounting		R76 Pole mounting		
2 Colour temp.	WW 3000K		NW 4000K	CW 5700K	
3 Optics	30°x120° Beam angle		45°x150° Beam angle	70°x120° Beam angle	
4 Control	DALI	Nema socket	Virtual Extension	PLC	DIM 1-10V