

## Street:LED



### Advantages

- ceramic LEDs, corrosion resistant
- a few types of lenses allowing optimum light distribution
- tool-free opening of the luminaire
- pressure compensation valve
- control possible in DALI, MainsDIM, CLO, StepDIM, and AstroDIM systems



Product code	P	lm	K	Ra	IP		
MXST29401	29	3300	4000K	>70	66	30°x120°	7,0 kg
MXST29402	29	3300	4000K	>70	66	45°x150°	7,0 kg
MXST29403	29	3300	4000K	>70	66	70°x120°	7,0 kg


Product code	P	lm	K	Ra	IP		
MXST47401	47	5500	4000K	>70	66	30°x120°	7,0 kg
MXST47402	47	5500	4000K	>70	66	45°x150°	7,0 kg
MXST47403	47	5500	4000K	>70	66	70°x120°	7,0 kg

Product code	P	lm	K	Ra	IP		
MXST56401	56	6600	4000K	>70	66	30°x120°	7,0 kg
MXST56402	56	6600	4000K	>70	66	45°x150°	7,0 kg
MXST56403	56	6600	4000K	>70	66	70°x120°	7,0 kg

Product code	P	lm	K	Ra	IP	A	kg
MXST84401	84	9900	4000K	>70	66	30°x120°	7,2 kg
MXST84402	84	9900	4000K	>70	66	45°x150°	7,2 kg
MXST84403	84	9900	4000K	>70	66	70°x120°	7,2 kg

Product code	P	lm	K	Ra	IP	A	kg
MXST108401	108	13250	4000K	>70	66	30°x120°	7,2 kg
MXST108402	108	13250	4000K	>70	66	45°x150°	7,2 kg
MXST108403	108	13250	4000K	>70	66	70°x120°	7,2 kg

## Dimensions

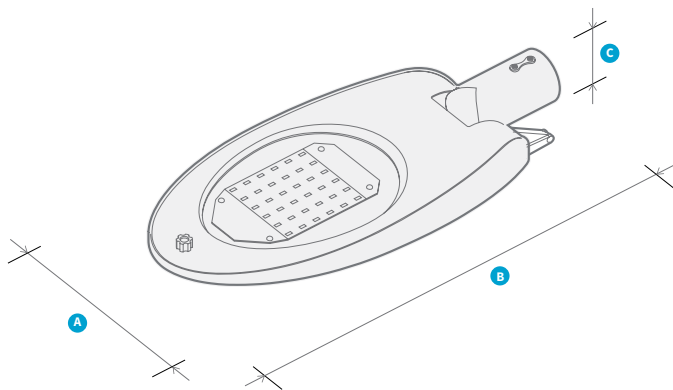


Product code	A	B	C
MXST	295	620	152


## Mounting



pole mounted



# Lighting area

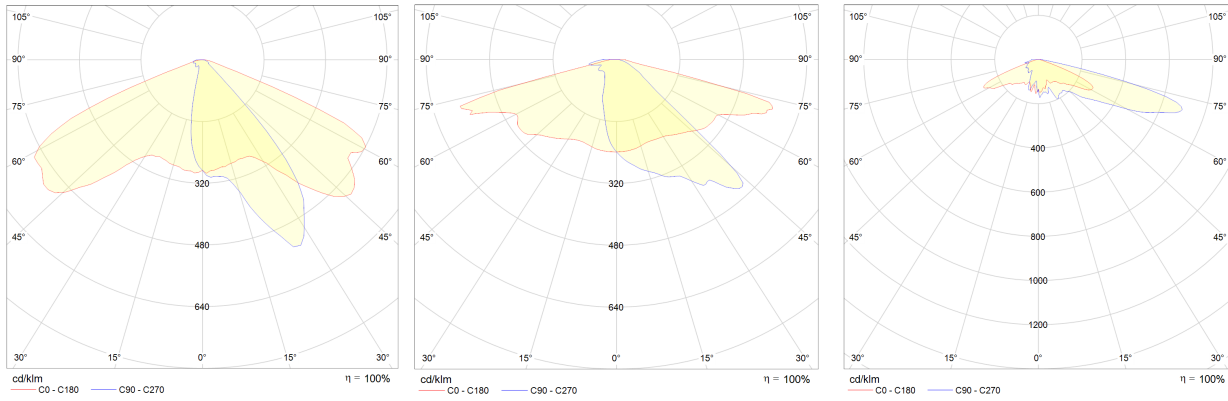

## Available configurations