



Interchangeable scales



Measuring instrument

Technical data

Type 412 82 with measuring instrument AM 72

	Moving iron	Moving coil
Marking accd. to 2014/34/EU	⊕ II 2 G Ex e II / ⊕ II 2 G Ex e mb II	⊕ II 2 G Ex ib IIC
EC-Type Examination Certificate	PTB 00 ATEX 3117	PTB 00 ATEX 3117
Permissible ambient temperature	-20 °C up to +40 °C -55 °C up to +55 °C (option)	-20 °C up to +40 °C -55 °C up to +55 °C (option)
Rated voltage	up to 690 V AC	up to 690 V AC
Power consumption (VA)	max. 0.31 VA	max. 0.31 VA
Overload range	10 fold - 25 sec. 25 fold - 4 sec. 50 fold - 1 sec. indicated 1 : 1.5, optional 1:6	10-fold - 5 sec.
Measuring range	max. 0 - 25 A direct / n / 1A	0/4 - 24 mA
Winding specification of moving coil		26.5 windings
Internal resistance		2.5 Ω ± 30 %
Inductance Li		< 0.1 mH
Capacitance Ci		< 0.1 nF
Open circuit voltage Ui		≤ 30 V
Short circuit current max. Ii		≤ 150 mA
Accuracy	Class 2.5	Class 1.5
Connecting terminals	2 x 1.5 - 4 mm <sup>2</sup>	
Degree of protection accd. to EN 60529	IP66	
Cable glands/Gland plates/Enclosure drilling	1 x M25 cable gland	
Dimensions (L x W x H)	160 x 95 x 62 mm	
Display size AM 72	72 x 72 mm	
Weight	0.8 kg	
Type of mounting	DIN rail mounting	
Enclosure colour	grey	

## Ex-measuring instrument AM 72 for panel mounting



Measuring instrument



Interchangeable scales

### 4 Ordering code for component (Code 2) - code A - B - C

**Code**            **A**                            **B**            **C**  
**Order No.**       **GHG 412 828**            **— R0**    **—**

### Ordering code for component (Code 2) - code A - B

Code	Component	Code		
<b>A</b>	Measuring instrument AM 72	GHG 412 828		
Code	Voltage	Code		
B	Direct connection	1		
	CT connection 1 /A	2		
	Power connection 0 - 20/24 mA (Scale 0-100% / 120%) <sup>1)</sup>	5		
	Power connection 4 - 20/24 mA (Scale 0-100% / 120%) <sup>1)</sup>	6		
	Moving-coil connection 0 - 20/24 mA (Scale 0-100% / 120%) <sup>1) 3)</sup>	7		
	Moving-coil connection 4 - 20/24 mA (Scale 0-100% / 120%) <sup>1) 3)</sup>	8		
Code	Measuring range/Scale	Code C	Measuring range/Scale	Code C
C	0 - 1	002	0 - 75 /112.5 A	013
	0 - 2.5 / 3.75 A <sup>2)</sup>	003	0 - 100 / 150 A	014
	0 - 5 / 7.5 A <sup>2)</sup>	004	0 - 150 / 225 A	015
	0 - 10 / 15 A <sup>2)</sup>	005	0 - 200 / 300 A	016
	0 - 15 / 22.5 A	006	0 - 250 / 375 A	017
	0 - 20 / 30 A <sup>2)</sup>	008	0 - 300 / 450 A	018
	0 - 30 / 45 A	009	0 - 400 / 600 A	019
	0 - 40 / 60 A	010	0 - 500 / 750 A	020
	0 - 50 / 75 A	011	0 - 600 / 900 A	021
	0 - 60 / 90 A	012	0 - 100% / 150%	033

<sup>1)</sup> Movements 0 - 20 mA/ 4 - 20 mA and with moving-coil connection are only available with scale 0 - 100%/ 120%.

<sup>2)</sup> Version for direct connection or with CT connection n/1 A possible.

<sup>3)</sup> Moving coil only for Ex-i or Ex-d flameproof applications

Other interchangeable scales available on request.



Interchangeable scales




Measuring instrument

Example for order No.

Measuring range	Movement	Order No.
<b>Measuring instrument AM 72, direct measurement</b>		
<b>Version with 1 x cable gland M25</b>		
0 – 1 / 1.5 A	Moving iron	GHG 412 8281 R0002
0 - 2.5 / 3.75 A	Moving iron	GHG 412 8281 R0003
0 - 5 / 7.5 A	Moving iron	GHG 412 8281 R0004
0 - 10 / 15 A	Moving iron	GHG 412 8281 R0005
0 - 16 / 24 A	Moving iron	GHG 412 8281 R0007
0 - 20 / 24 mA 0-100% / 120% (Ri = 320 Ω)	Moving coil	GHG 412 8285 R0033
4 - 20 / 24 mA 0-100% / 120% (Ri = 320 Ω)	Moving coil	GHG 412 8286 R0035
<b>Measuring instrument AM 72, CT connection n/1A</b>		
<b>Version with 1 x cable gland M25</b>		
0 – 1 / 1.5 A	Moving iron	GHG 412 8282 R0002
0 - 2.5 / 3.75 A	Moving iron	GHG 412 8282 R0003
0 - 5 / 7.5 A	Moving iron	GHG 412 8282 R0004
0 - 10 / 15 A	Moving iron	GHG 412 8282 R0005
0 - 15 / 22.5 A	Moving iron	GHG 412 8282 R0006
0 - 20 / 30 A	Moving iron	GHG 412 8282 R0008
0 - 30 / 45 A	Moving iron	GHG 412 8282 R0009
0 - 40 / 60 A	Moving iron	GHG 412 8282 R0010
0 - 50 / 75 A	Moving iron	GHG 412 8282 R0011
0 - 60 / 90 A	Moving iron	GHG 412 8282 R0012
0 - 75 / 112.5 A	Moving iron	GHG 412 8282 R0013
0 - 100 / 150 A	Moving iron	GHG 412 8282 R0014
0 - 150 / 225 A	Moving iron	GHG 412 8282 R0015
0 - 200 / 300 A	Moving iron	GHG 412 8282 R0016
0 - 250 / 375 A	Moving iron	GHG 412 8282 R0017
0 - 300 / 450 A	Moving iron	GHG 412 8282 R0018
0 - 400 / 600 A	Moving iron	GHG 412 8282 R0019
0 - 500 / 750 A	Moving iron	GHG 412 8282 R0020
0 - 600 / 900 A	Moving iron	GHG 412 8282 R0021
0 - 100% / 150%	Moving iron	GHG 412 8282 R0031

Dimension drawing

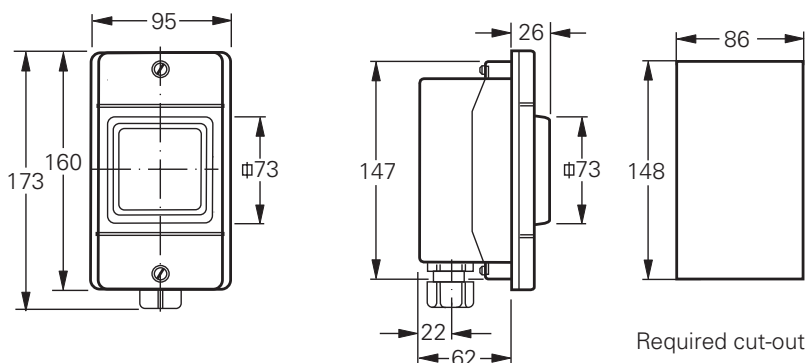

Required cut-out