

RONDO



BVCert. 6037554




Design: Xavier Houy

Rondo, the luminaire with a timeless look, that's designed to last.

Surface or flush mounted, the most powerful and robust of the architectural luminaires for communal areas in residential properties and outdoors.

- ↘ **More powerful**
Up to 42 W fluorescent or LED 3200 lm.
- ↘ **More efficient**
Thanks to its lighting management: DALI ballasts and LED and fluorescent dimming solutions.
- ↘ **Greater savings**
With the new Sensor Pro detectors or twilight switches built in.

- 1 3.5 mm polycarbonate diffuser (120 J)
- 2 Vandal resistant screws
- 3 Marine-grade aluminium rip-out-resistant skirt
- 4 Supplied c/w sealing washers
- 5 Knock-out cable entries (2 sides, 1 central)

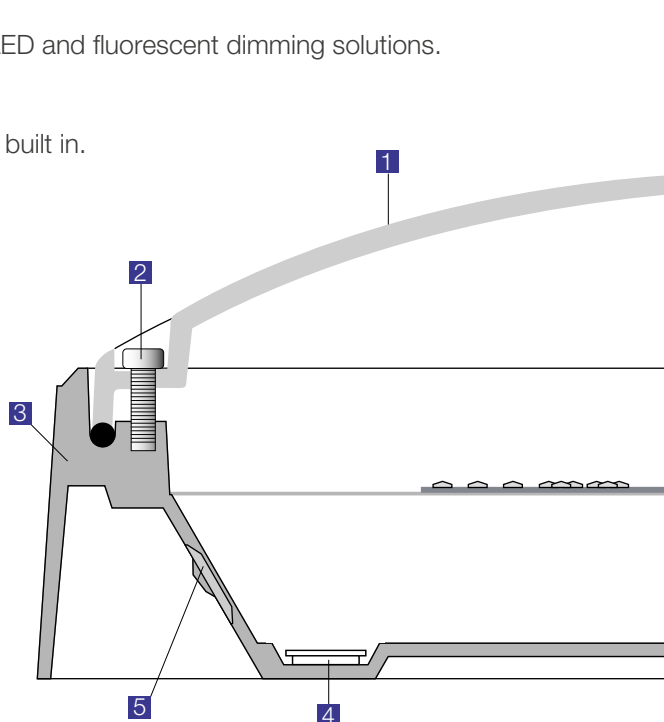



RONDO

IK10++ / 120 J




Surface or flush mounted,
the most powerful and robust
of the architectural luminaires.




Rondo

Rondino



Features:

- Architectural luminaire, 120-joules resistance
- Available in two sizes
- Die-cast marine-grade aluminium base
- Opal polycarbonate diffuser (except for Rondo fluo: clear frosted)
- Stainless steel vandal-resistant screws
- Plug-in gear tray



ø 330 mm (Rondo)
ø 270 mm (Rondino)



114 mm (Rondo)
97 mm (Rondino)


Options available on request:

- 3000 K LEDs
- Version with emergency pack
- Stand-by LED
- Class 2
- Twilight photocell


Vandal-resistant tool (bit) to be ordered separately
code: 9800 0003

Radio remote control to be ordered separately
code: 9800 0010

Rondo - code: 2520 0400

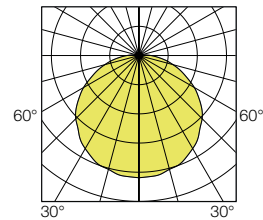

Rondino - code: 2560 0400

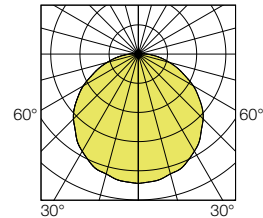

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	CCT (K) (CRI min.)	White	Grey	Black
LED 1800	16	1234	77	4000 (80)	2520 04 ..	2520 14 ..	2520 24 ..
LED 2400	20	1665	83	4000 (80)	2523 04 ..	2523 14 ..	2523 24 ..
LED 3200	32	2211	69	4000 (80)	2521 04 ..	2521 14 ..	2521 24 ..

Coding:
replace the two dashes (--) by the corresponding figures: e.g. **2520 04 ..**

- 00** no detection
- 20** DALI dimmable
- 12** with Pro detection
- 13** with Pro detection + extinction or standby warning
- 16** with Pro detection + radio-control
- 17** with Pro detection + extinction or standby warning + radio-control
- 03** slave version + extinction or stand-by warning
- 07** slave version + extinction or stand-by warning + radio-control

Designation	Base	White	Grey	Black
2 x 18 W TC-DE	G24q-2	2500 04 ..	2500 14 ..	2500 24 ..
1 x 26 W TC-DE	GX24q-3	2501 04 ..	2501 14 ..	2501 24 ..
1 x 32 W TC-TE	GX24q-3	2502 04 ..	2502 14 ..	2502 24 ..
1 x 42 W TC-TE	GX24q-4	2503 04 ..	2503 14 ..	2503 24 ..


Supplied c/w lamps (4000 K)
* apart from exceptions

Coding:
replace the two dashes (--) by the corresponding figures: e.g. **2500 04 ..**

- 00** no detection
- 21** DALI dimmable + switch dimming + standby warning
- 12** with Pro detection
- 14** with Pro detection + extinction warning
- 15** with Pro detection + standby warning
- 04** slave version + extinction warning
- 05** slave version + stand-by warning

Additional options Rondo

Coding:
add the corresponding suffix to the product code: e.g. **2520 0400**

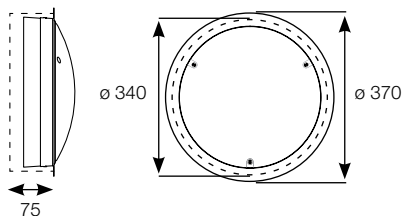

Flush-mounting dimensions:
Rondo: ø 340 mm x 75 mm

- 9406** opal PC diffuser (for fluorescent version)
- 9501** Class 1 (for fluorescent version)
- 9702** stainless steel crosspoint screws (VK54)
- 9802** flush-mounting version



